


# Mid-bass speaker L6-4R


6"  
5"  
4"  
2"  
0"



**SPL vs Freq**

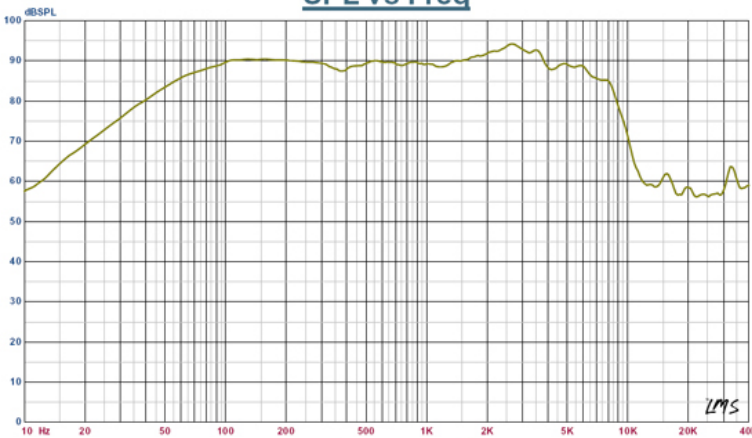

**Impedance vs Freq**

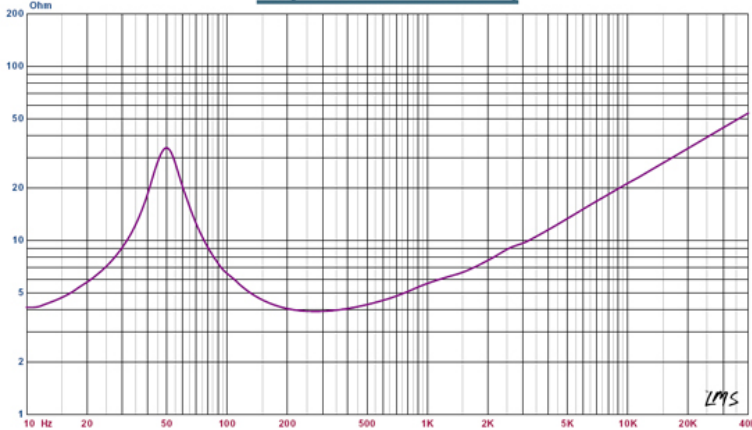

**Specification**

- Rated Impedance 4ohm
- Resonant Frequency 50H z
- Rated Power 30W
- Max Power 60W
- Sensitivity(2.83v/1m) 88dB
- Coil diameter 30mm
- Coil Roll With 14.6mm
- DC resistance 3.6ohm
- coil wire High temp. SV wire
- Coil frame High temp. Kapton
- Magnet High perf. ferrite
- Force coefficient 6.0N/A
- Magnetic gap height 6.0mm
- Xmax 4.3mm
- Compliance 588uM/N
- Mechanical Q value 3.856-
- Electric Q value 0.44 -
- Total Q value 0.4 -
- Vibration Quality 17.3g
  
- Equivalent volume 14.7L
- Cabinet type Inverted

