

Non-polar RS-485 Interface Circuit

PRODUCT DESCRIPTION

The MS1585/MS1585M/MS1585D is a RS-485 transceiver with with automatic bus-polarity correction. The bus pins are robust to electrostatic discharge (ESD) events, with high levels of protection to Human-Body Model(HBM,±20kV), Air-Gap Discharge, and Contact Discharge specifications, the Data Rate can transmit up to 10Mbps. The driver differential outputs and the receiver differential inputs are connected internally to form a bus port suitable for half-duplex communication.

FEATURES

- Bus-Pin Protection:
 - ±20kV HBM Protection
 - ±12kV IEC61000-4-2 Contact Discharge
 - +4kV IEC61000-4-4 Fast Transient Burst
- Up to 256 Nodes on a Bus
- Bus-Polarity Correction Within 76 ms
- Data Rate: 300 bps to 10Mbps
- Power Range:4.5V-6.0V

APPLICATIONS

- E-Metering Networks
- Industrial Automation
- HVAC Systems
- Process Control
- Battery-Powered Applications
- Motion Control
- RS-485 interface


PRODUCT SPECIFICATION

Part Number	Package	Marking
MS1585	SOP8	MS1585
*MS1585M	MSOP8	MS1585M
*MS1585D	DIP8	MS1585D

*The package is not available temporarily. If necessary, please contact Hangzhou Ruimeng Sales Department Center.




SOP8



MSOP8



DIP8

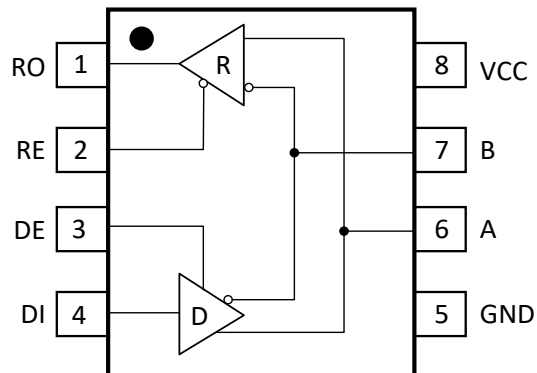PIN CONFIGURATIONS

PIN DESCRIPTION

Pin	Symbol	Type	Description
1	RO	O	Receive Data Output
2	RE	I	Receiver Enable, Active Low
3	DE	I	Driver Enable, Active High
4	DI	I	Driver Data Input
5	GND	-	Ground
6	A	I/O	Driver Output or Receiver Input (Complementary to B)
7	B	I/O	Driver Output or Receiver Input (Complementary to A)
8	VCC	-	Supply

ABSOLUTE MAXIMUM RATINGS

Any exceeding absolute maximum rating application causes permanent damage to device. Because long-time absolute operation state affects device reliability. Absolute ratings just conclude from a series of extreme tests. It doesn't represent chip can operate normally in these extreme conditions.

Parameter	Symbol	Ratings	Unit
Supply voltage	VCC	-0.5 ~ +8	V
Input voltage at control pin	VDE, VRE	-0.5 ~ +8	V
Driver Input Voltage	VDI	-0.5 ~ +8	V
Driver Output Voltage	VA, VB	-0.5 ~ +8	V
Receiver Input Voltage	VA, VB	-7 ~ +12	V
Receiver Output Voltage	VRO	-0.5 ~ +8	V
Continuous Power Dissipation(at 70°C)	PC	470(SOP8)	mW
		725(DIP8)	
Storage temperature	TSTORE	-60 ~ +150	°C
Lead Temperature (10s)	TSOLDERING	+260	°C

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	+4.5		+6	V
Input Voltage on DI,DE,RE	VDE, VRE	-0.5		VCC	V
Bus Voltage	VA, VB	-7		+12	V
Operating Temperature Range	TWORK	-40		+120	°C

ELECTRICAL CHARACTERISTICS
DC Electrical Characteristics

VCC=5.0V, TA = 25°C, unless otherwise noted.


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Driver Differential Output Voltage	VOD	No Load	4	4.5		V
		RL=50Ω	2	2.5		
Change in Magnitude of Driver Differential Output	ΔVOD	RL=50Ω			0.2	V
Driver Common-mode Output Voltage	VOC	RL=50Ω			3	V
Change in Magnitude of Driver Common-mode Output Voltage	ΔVOC	RL=50Ω			0.2	V
Input High Voltage	VIH	DE,RE,DI	2			V
Input Low Voltage	VIL	DE,RE,DI			0.8	V
logic input current	IIN,LOGIC	DE,RE,DI			±2	μA
input Current(A, B)	IIN,BUS	DE=0V, VIN=5V		40	90	μA
		VCC=5V VIN=0V		60	100	
Receiver Differential Threshold Voltage	VTH	-7V≤VCM≤12V	-0.2		0.2	V
Receiver Input Hysteresis	ΔVTH	VCM=0V		25		mV
Receiver Output High Voltage	VOH	IOUT=-1.5mA,VID=200mV	4.2	4.8		V
Receiver Output Low Voltage	VOL	IOUT=-1.5mA,VID=200mV		0.1	0.2	V
Three-state Output Current at Receiver	IOSR	VCC=5V,0V≤VOUT≤VCC			±1	μA
Receiver Input Resistance	RIN	-7V≤VCM≤12V		100		kΩ
Supply Current	ICC	No Load,RE=DE=DI=0V or VCC		0.48	0.9	mA
Driver Short-Circuit Current,	IOSD	VOUT = -7V	25			mA
		VOUT = 12V	25			
Receiver Short-Circuit Current	IOSR	0V≤VRO≤VCC	7			mA
ESD Protection(A,B)	VESD	HBM		±20		kV

Switching Characteristics

VCC=5.0V, TA = 25°C, unless otherwise noted.


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Driver Input to Output	tPLH	RD _{DIFF} =50Ω, CL _A =CL _B =100pF	10	35	70	ns
	tPHL		10	50	90	
Driver Input to Output	tPDS	RD _{DIFF} =50Ω, CL _A =CL _B =100pF		30		ns
Driver Rise Time	tTTR	RD _{DIFF} =50Ω, CL _A =CL _B =100pF		40	70	ns
Driver Fall Time	tTTF	RD _{DIFF} =50Ω, CL _A =CL _B =100pF		40	70	ns
Driver Enable to Output High	tPZH	CL=100pF		30	70	ns
Driver Enable to Output Low	tPZL	CL=100pF		30	70	ns
Driver Disable Time from Low	tPHZ	CL=100pF		90	110	ns
Driver Disable Time from High	tPLZ	CL=100pF		100	120	ns
Receiver Input to Output	tPLH	CL=15pF	20	60	200	ns
	tPHL		20	40	200	
Differential Receiver Skew	tPDS	CL=15pF, tPLH -tPHL		20		ns
Receiver Enable to Output High	tPZH	CL=15pF		50	80	ns
Receiver Enable to Output Low	tPZL	CL=15pF		60	90	ns
Receiver Disable Time from High	tPHZ	CL=15pF		50	80	ns
Receiver Disable Time from Low	tPLZ	CL=15pF		60	90	ns
Maximum Data Rate	fMAX				10	Mbps
Bus Fail Safe Time	tC	DE=RE=0, RO=0	44	58	76	ms

APPLICATIONS INFORMATION

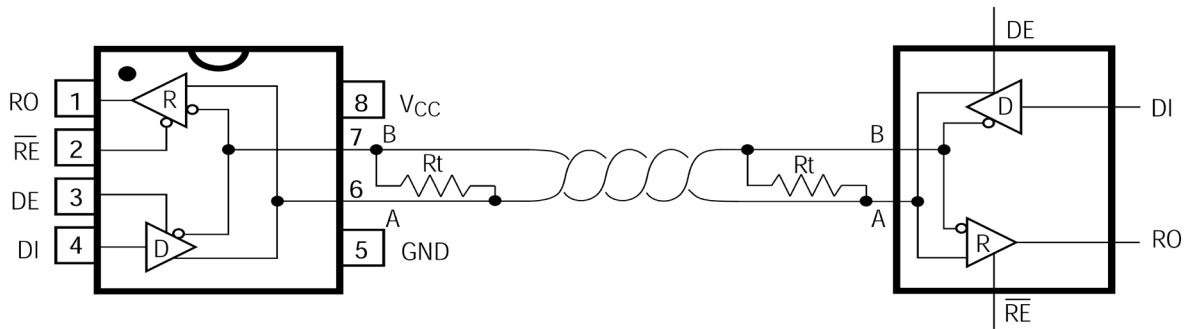


PACKAGE OUTLINE DIMENSIONS

SOP8

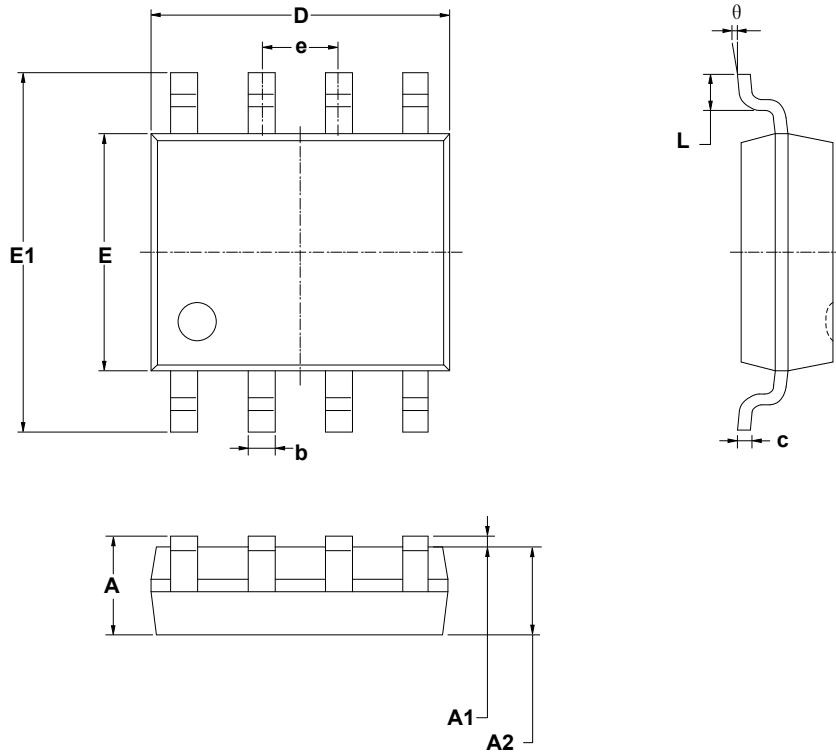


Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

MSOP8

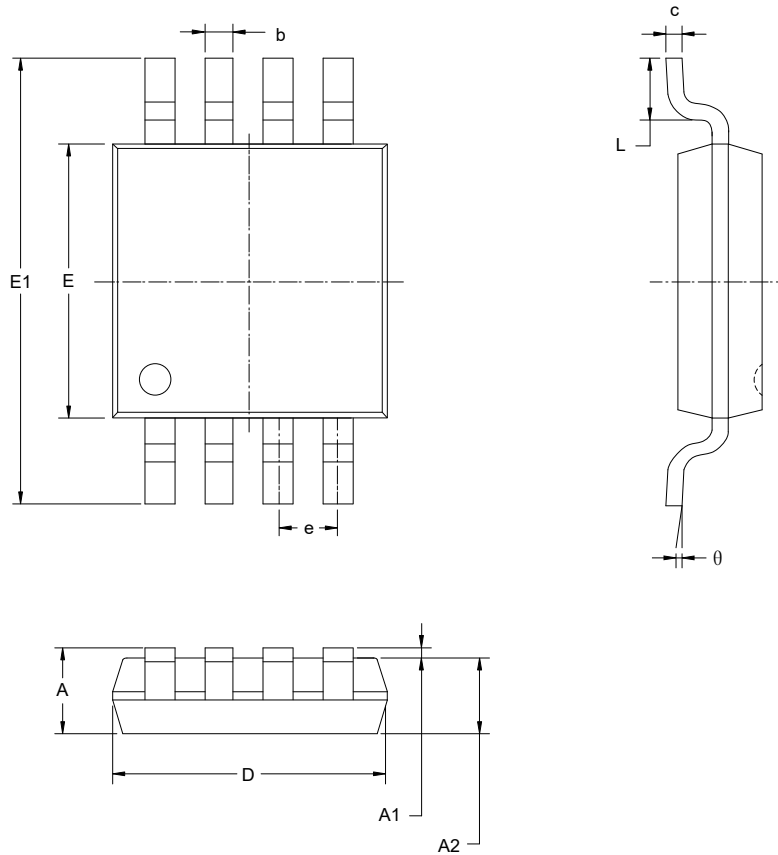

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650BSC		0.026BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


DIP8

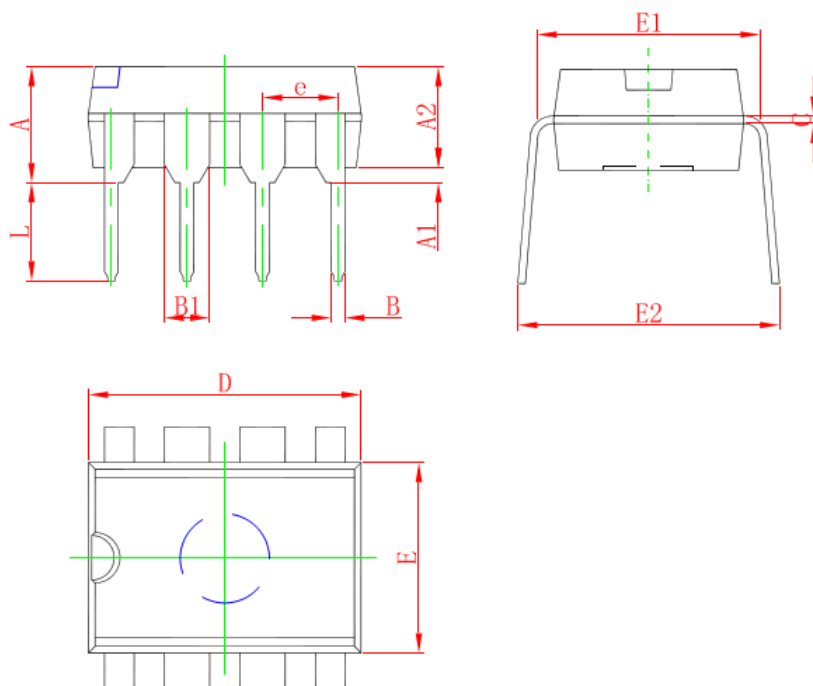

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510		0.020	
A2	3.200	3.600	0.126	0.142
B	0.380	0.570	0.015	0.022
B1	1.524(BSC)		0.060(BSC)	
C	0.204	0.360	0.008	0.014
D	9.000	9.400	0.354	0.370
E	6.200	6.600	0.244	0.260
E1	7.320	7.920	0.288	0.312
e	2.540(BSC)		0.100(BSC)	
L	3.000	3.600	0.118	0.142
E2	8.400	9.000	0.331	0.354

MARKING and PACKAGING SPECIFICATION

1. Marking Drawing Description

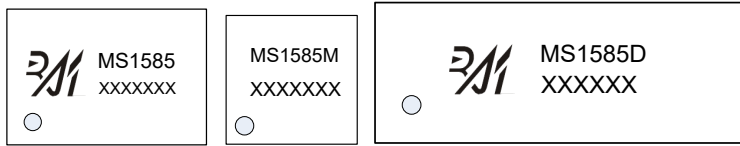

Product Name : MS1585, MS1585M, MS1585D

Product Code : XXXXXX, XXXXXX

2. Marking Drawing Demand

Laser printing, contents in the middle, font type Arial.

3. Packaging Specification

Device	Package	Piece/Reel	Reel/Box	Piece/Box	Box/Carton	Piece/Carton
MS1585	SOP8	2500	1	2500	8	20000
MS1585M	MSOP8	3000	1	3000	8	24000

Device	Package	Piece/Tube	Tube/Box	Piece /Box	Box/Carton	Piece/Carton
MS1585D	DIP8	50	40	2000	10	20000

STATEMENT

- All Revision Rights of Datasheets Reserved for Ruimeng. Don't release additional notice.
Customer should get latest version information and verify the integrity before placing order.
- When using Ruimeng products to design and produce, purchaser has the responsibility to observe safety standard and adopt corresponding precautions, in order to avoid personal injury and property loss caused by potential failure risk.
- The process of improving product is endless. And our company would sincerely provide more excellent product for customer.

**MOS CIRCUIT OPERATION PRECAUTIONS**

Static electricity can be generated in many places. The following precautions can be taken to effectively prevent the damage of MOS circuit caused by electrostatic discharge:

1. The operator shall ground through the anti-static wristband.
2. The equipment shell must be grounded.
3. The tools used in the assembly process must be grounded.
4. Must use conductor packaging or anti-static materials packaging or transportation.



+86-571-89966911



Rm701, No.9 Building, No. 1 WeiYe Road, Puyan Street, Binjiang District, Hangzhou, Zhejiang



[http:// www.relmon.com](http://www.relmon.com)